



Model 100 QD 100 kW Diesel Generator Set

Generator Set Rating

Three Phase 60 Hz 50 Hz
 kW/KVA kW/KVA

Continuous		
Standby 150°C	100/125	90/112
Prime Power 105°C	90/112	81/101

Single Phase 60 Hz 50 Hz
 kW/KVA kW/KVA

Continuous		
Standby 150°C	74/74	80/80
Prime Power 105°C	64/64	62/62

60 Hz Sound levels @ 23 ft. (7M)


No load 69 dBa
Full load 72 dBa

Quality Power Producing Equipment

is our business at Elliott MagneTek Power Systems, Inc.. Our power systems offer solutions to requirements for reliable, quality electrical power.

- 100% full load tested.
- Performance supported by prototype testing.

- 12 lead re-connectable AC synchronous generators.
- Solid state automatic voltage regulator.
- 50 or 60 Hz operational.
- Standard Digital Control Panel meeting standards set by NFPA-110.

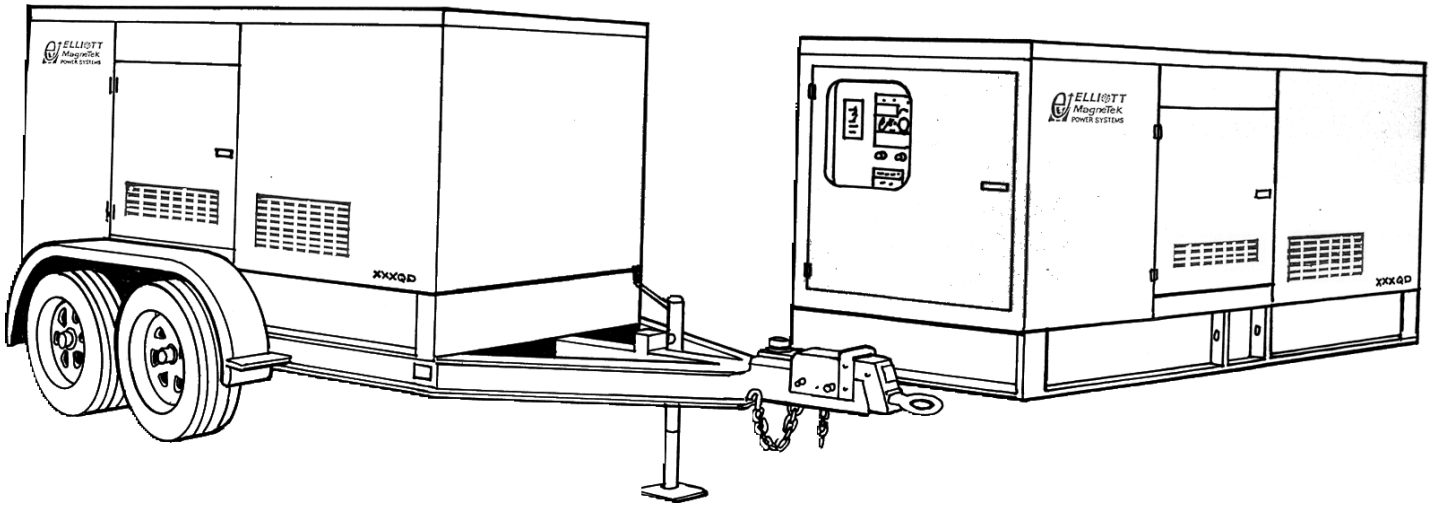

Product Features

System Reliability and Longevity

begin with design experience and integrity. EMPS was formed by two companies with over one hundred years experience producing state-of-the-art power generation equipment. This experience is designed into our generator sets.

Single Source Responsibility:

Product service, support and parts available through EMPS network of distributors.

Accessories and Flexibility

are designed into EMPS' generator sets at the factory level to meet specific application needs.

Organizational Commitment

to innovative, leading edge technology and environmentally friendly electrical products and services.

Generator Set Design Features

Model 100 QD 100 kW Diesel Generator Set

Standard Equipment

- * 4 Cycle engine.
- * AC synchronous 12 lead re-connectable brushless alternator.
- * Steel base with vibration isolators between engine, generator and base.
- * Generator mounted terminal and meter /control box.
- * Circuit breaker-mounting provisions.
- * Connection area for main AC terminals and all control wiring
- * 12 volt DC engine electrical system.
- * 12 volt starter motor.
- * Battery charging alternator.
- * Battery rack and cables.
- * Flexible fuel lines.
- * Most metallic parts incorporate our powder paint primer base coat with UV inhibitive enamel top coat.
- * Single stage dry type air cleaner.
- * Corrosion resistant hardware.
- * Oil drain extension plumbed to base rail for convenient connection.
- * Microprocessor based auto start meter/ control panel.
- * Digital read out control system rated to operate from -30° C to 75° C with the following standard displays, shown continuously:
 - ** Generator AC voltage.
 - ** AC amperage:
 - Phase 1-2
 - Phase 2-3
 - Phase 3-1
 - ** Frequency
 - ** Oil Pressure
 - ** Engine Temperature
 - ** Battery Voltage
 - ** Fuel Level (Diesel Only)
- * The following can be displayed using the scroll lock function:
 - ** Run time
 - ** Safety set point for over speed
 - ** Over crank
 - ** High water temperature
 - ** Low oil pressure
- * Voltage adjust rheostat
- * Auto/off /run switch

Generator Specifications

Manufacturer: MagneTek

Insulation: The main stator, main rotor, exciter stator and exciter rotor are all insulated with Class H materials and rated Class F per NEMA MG1 -1.65 and 852757 definition. All materials are non-hygroscopic to prevent fungus growth. A polyester and epoxy combination offers maximum environmental protection.

Main Stator: 2/3 pitch and one slot skewing minimize voltage harmonics and meets telephone influence factor (TIF) per NEMA MG1-22.43. Twelve lead re-connectable design. Coated with anti-abrasive sealer.

Main Rotor: Four pole single piece lamination with full amortisseur windings and coil supports. Winding is precision wet layer wound with epoxy resin and dynamically balanced to two mil in two planes. Production over speed tested at 125% for 15 minutes. All materials are non-hygroscopic to prevent fungus growth.

Exciter: Brushless, three phase, six-pole rotor, and production over speed tested at 125% operating speed.

Rotating Diode: Sealed full wave with metal oxide surge suppressor

Bearing: Double-sealed, permanently lubricated, 50,000 hour B-10 life including magnetic pull.

Drive Coupling: Positive alignment, flexible drive discs.

Automatic Voltage Regulator Specifications

Operation: Volts per hertz, three phase sensing with overload and loss of sensing protection.

Construction: Solid state, modular: fully sealed and potted design provides component protection from corrosive environments and vibration.

Voltage Regulation: +/- 1% voltage regulation no load to full rated load: +/- 1/2% voltage regulation at steady state conditions.

Radio Interference (RFI): Integral filter provides suppression of conducted electromagnetic interference to levels meeting most commercial requirements.

Voltage Selections and Full Load Amperages at Standby Rating

Three Phase

60 Hz Amperage	50 Hz Amperage
120/208 347	110/190 342
120/240 300	120/208 312
277/480 150	230/400 162
347/600 120	240/415 157

*Single Phase

60 Hz Amperage	50 Hz Amperage
120/240 308	110/220 363

All voltages listed are available and/or re-connectable with the exception of the three phase, 60 Hz, 347/600 volt generator which is application specific. For other voltages, contact your EMPS distributor. All output amperage ratings listed above are at standby rating.

*Single Phase amperage based on standard generator and unity power factor. For full single phase output use generator model MTG41.

Application and Performance Data

MagneTek Alternator Model MTG35 is standard with this package. Larger generators may be required to meet certain application specific requirements such as Single Phase, Motor Starting and Non Linear Loads. The Maximum Generator rating available in this package is MTG44.

Technical Specifications

Model 100 QD 100 kW Diesel Generator Set

Engine Specifications

Manufacturer	Perkins	
Model	1006-6T	
Type	In line 4 Stroke	
Aspiration	Turbo	
Cylinders	6	
Displacement	366 In ³ . (6.0 L)	
Bore and Stroke,	3.94 in x 5.00 in. (100 mm x 127 mm)	
Compression Ratio	17.3:1	
Minimum C.C.A. at 5°C	780	
RPM	1800 rpm	1500 rpm
BHP Minimum REQ'D at Rated kW	154	139
BMEP	171 psi	185 psi

Generator Set Deration

Factors

Temperature:
2.5% for every 5° F above 105° F
2.5% for every 9°C above 41°C

Altitude

2% for every 2000 feet above
2000 feet
2% for every 607 meters above
607 meters

Cooling System

High Ambient 105°F (41°C) System
Coolant Capacity with Radiator
29.3 qt. (27.7 L)

Maximum restriction on discharge side of
radiator .5 In wc (125 Pa)

	1800 rpm	1500 rpm
Coolant Flow		
44 GPM (166.6 LPM)	36 GPM (136.3 LPM)	
Heat Rejection to Coolant at Full Load	4549 Btu/min (480 MJ/min)	3980 Btu/min (420 MJ/min)

Air System

	1800 rpm	1500 rpm
Maximum Air Intake Restriction		30 In wc (7.5 kPa)
Radiator Cooling Air Flow	4954 cfm (140 m ³ /min)	4070 cfm (115 m ³ /min)
Combustion Air Flow	275 cfm (7.8 m ³ /min)	211 cfm (6.0 m ³ /min)
Generator Cooling Air Flow	2348 cfm (66.4 m ³ /min)	1957 cfm (55.4 m ³ /min)

Exhaust System

Exhaust Manifold
Outlet Size 3.1 in. dia. (7.8 cm)
Maximum Allowable Back Pressure
40.9 In wc (10.2 kPa)

Exhaust Gas Flow

at Standby
Rating 794 cfm 624 cfm
(22.5 m³/min)(17.7 m³/min)

Exhaust Temp at
Standby Rating

1076°F (580°C) 1085°F (585°C)

Fuel System

Consumption at Standby Rating:

Load	1800 RPM		
	kW	US gal/h	Litre/h
1/4	25	1.6	7.3
1/2	50	3.6	16.4
3/4	75	5.0	22.5
Full	100	6.4	29.2
Load	1500 RPM		
	kW	US gal/h	Litre/h
1/4	22.5	1.3	6.1
1/2	45	3.0	13.6
3/4	67.5	4.2	18.7
Full	90	5.3	24.2

Governor Type Mechanical
Governor Regulation:
+/- 3-5% Steady State

Generator

Manufacturer	MagneTek
Model	MTG35
Motor Starting KVA, 240/480 Volt WYE at 35% Voltage Dip, 100% Voltage Recovery	288 SKVA
Maximum Motor Starting KVA, 35% Voltage Dip Oversized Generator MTG44	580 SKVA

Reactances

	480 V	400 V
at 105°C rise	60Hz	50Hz
Synchronous Xd	3.09	2.75
Direct Axis Transient X'd	.233	.207
Direct Axis Subtransient X'd	.154	.137
Zero Sequence Xo	.0026	.0023

Lubrication System

Engine Oil Capacity with Filters
4.63 US gal. (17.5 L)
Oil Filter Type Spin On

Engine Exhaust Emissions

Certification Values

Exhaust Emissions (g/bhp-hr.)

	*CARB
HC:	1
CO:	3.7
NOx:	6.9
PM:	.52

Smoke Opacity (%)

Acceleration	20
Lugging	15
Peak	50

* California Air Resources Board
Standards.

Perkins has certified the 1006-6T engine
as compliant.

Model 100 QD 100 kW Diesel Generator Set

Options:

Generator

- * Upsized
- * Tropical winding protection
- * Space heater
- * Series boost
- * UL listed mainline circuit breaker

Control

- * Remote alarm annunciator
- * Emergency stop
- * Multi-point dry contact board.
- * NFPA 110 Compliance
- * Low Temperature Display Heater

Engine

- * Battery/Battery heater
- * Battery charger
- * Engine pre-heater
- * Fuel/ water separator
- * Isochronous governor


Generator Set

- * EMPS automatic transfer switch
- * Industrial silencer
- * Residential silencer
- * Critical silencer
- * Weather protective enclosure
- * Sound attenuation
- * Sub-base fuel tank

DOOR SWING:
ENGINE DOOR: 40.75
SECURITY DOOR: 45.75

MACHINE WEIGHT:
ENCLOSED DRY WEIGHT 4476 LBS [2030.3 KG]

NOTES:
PRELIMINARY DRAWING DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE.

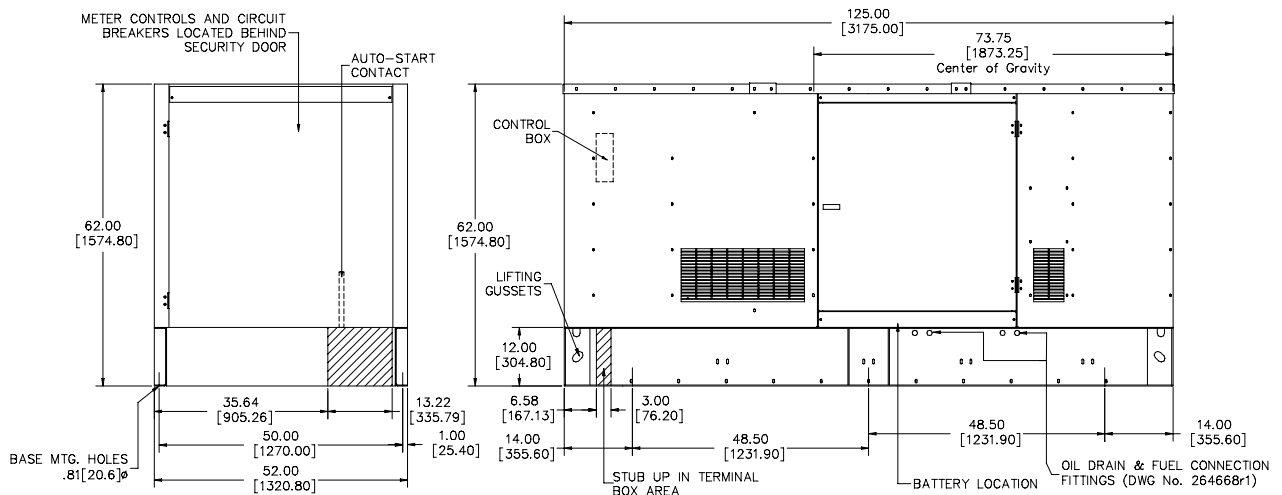

58 Elliott Power Drive
P.O. Box 403
Lexington, TN 38351
Tel: 901-967-9393
Fax: 901-968-0161

Distributed by:



All specifications subject to change without notice. Printed in the USA

Updated 2/00