



Model 15 QD 15 kW Diesel Generator Set

Generator Set Rating

Three Phase 60 Hz 50 Hz
kW/KVA kW/KVA

Continuous
Standby 150°C 15/18 13/16
Prime Power 105°C 14/17 11/13

Single Phase 60 Hz 50 Hz
kW/KVA kW/KVA

Continuous
Standby 150°C 13/13 11/11
Prime Power 105°C 10/10 8/8

60 Hz Sound levels @ 23 ft. (7m)


No load 64 dBa
Full load 68 dBa

Quality Power Producing Equipment

is our business at Elliott MagneTek Power Systems, Inc.. Our power systems offer solutions to requirements for reliable, quality electrical power.

- 100% full load tested.
- Performance supported by prototype testing.

- 12 lead re-connectable AC synchronous generators.
- Solid state automatic voltage regulator.
- 50 or 60 Hz operational.
- Standard Digital Control Panel meeting standards set by NFPA-110.

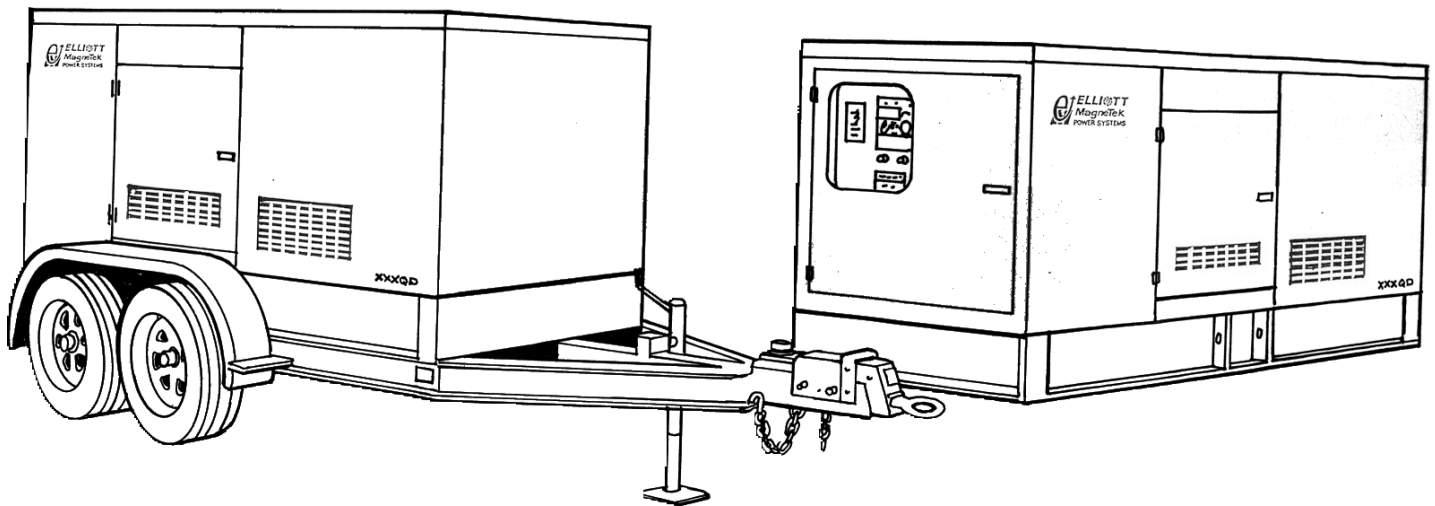

Product Features

System Reliability and Longevity

begin with design experience and integrity. EMPS was formed by two companies with over one hundred years experience producing state-of-the-art power generation equipment. This experience is designed into our generator sets.

Single Source Responsibility:

Product service, support and parts available through EMPS network of distributors.

Accessories and Flexibility

are designed into EMPS' generator sets at the factory level to meet specific application needs.

Organizational Commitment

to innovative, leading edge technology and environmentally friendly electrical products and services.

Generator Set Design Features

Model 15 QD 15 kW Diesel Generator Set

Standard Equipment

- * 4 Cycle engine.
- * AC synchronous 12 lead re-connectable brushless alternator.
- * Steel base with vibration isolators between engine, generator and base.
- * Generator mounted terminal and meter /control box.
- * Circuit breaker-mounting provisions.
- * Connection area for main AC terminals and all control wiring
- * 12 volt DC engine electrical system.
- * 12 volt starter motor.
- * Battery charging alternator.
- * Battery rack and cables.
- * Flexible fuel lines.
- * Most metallic parts incorporate our powder paint primer base coat with UV inhibitive enamel top coat.
- * Single stage dry type air cleaner.
- * Corrosion resistant hardware.
- * Oil drain extension plumbed to base rail for convenient connection.
- * Microprocessor based auto start meter/ control panel.
- * Digital read out control system rated to operate from -30° C to 75° C with the following standard displays, shown continuously:
 - ** Generator AC voltage.
 - ** AC amperage:
 - Phase 1-2
 - Phase 2-3
 - Phase 3-1
 - ** Frequency
 - ** Oil Pressure
 - ** Engine Temperature
 - ** Battery Voltage
 - ** Fuel Level (Diesel Only)
- * The following can be displayed using the scroll lock function:
 - ** Run time
 - ** Safety set point for over speed
 - ** Over crank
 - ** High water temperature
 - ** Low oil pressure
- * Voltage adjust rheostat
- * Auto/off /run switch

Generator Specifications

Manufacturer: MagneTek

Insulation: The main stator, main rotor, exciter stator and exciter rotor are all insulated with Class H materials and rated Class F per NEMA MG1 -1.65 and 852757 definition. All materials are non-hygroscopic to prevent fungus growth. A polyester and epoxy combination offers maximum environmental protection.

Main Stator: 2/3 pitch and one slot skewing minimize voltage harmonics and meets telephone influence factor (TIF) per NEMA MG1-22.43. Twelve lead re-connectable design. Coated with anti-abrasive sealer.

Main Rotor: Four pole single piece lamination with full amortisseur windings and coil supports. Winding is precision wet layer wound with epoxy resin and dynamically balanced to two mil in two planes. Production over speed tested at 125% for 15 minutes. All materials are non-hygroscopic to prevent fungus growth.

Exciter: Brushless, three phase, six-pole rotor, and production over speed tested at 125% operating speed.

Rotating Diode: Sealed full wave with metal oxide surge suppressor

Bearing: Double-sealed, permanently lubricated, 50,000 hour B-10 life including magnetic pull.

Drive Coupling: Positive alignment, flexible drive discs.

Automatic Voltage Regulator Specifications

Operation: Volts per hertz, three phase sensing with overload and loss of sensing protection.

Construction: Solid state, modular: fully sealed and potted design provides component protection from corrosive environments and vibration.

Voltage Regulation: +/- 1% voltage regulation no load to full rated load: +/- 1/2% voltage regulation at steady state conditions.

Radio Interference (RFI): Integral filter provides suppression of conducted electromagnetic interference to levels meeting most commercial requirements.

Voltage Selections and Full Load Amperages at Standby Rating

Three Phase

| 60 Hz Amperage | 50 Hz Amperage |
|----------------|----------------|
| 120/208 | 52 110/190 49 |
| 120/240 | 45 120/208 45 |
| 277/480 | 23 230/400 23 |
| 347/600 | 18 240/415 23 |

*Single Phase

| 60 Hz Amperage | 50 Hz Amperage |
|----------------|----------------|
| 120/240 | 54 110/220 50 |

All voltages listed are available and/or re-connectable with the exception of the three phase, 60 Hz, 347/600 volt generator which is application specific. For other voltages, contact your EMPS distributor. All output amperage ratings listed above are at standby rating.

*Single Phase amperage based on standard generator and unity power factor. For full single phase output use generator model MTG21.

Application and Performance Data

MagneTek Alternator Model MTG20 is standard with this package.

Larger generators may be required to meet certain application specific requirements such as Single Phase, Motor Starting and Non Linear Loads. The Maximum Generator rating available in this package is MTG23.

Technical Specifications

Model 15 QD 15 kW Diesel Generator Set

Engine Specifications

| | | |
|-----------------------|---------------------------------------|-----------------|
| Manufacturer | Isuzu | |
| Model | 4LE1PV02 | |
| Type | In line 4 Stroke | |
| Aspiration | Natural | |
| Cylinders | 3 | |
| Displacement | 134 In ³ . (2.2 L) | |
| Bore and Stroke, | 3.35 in x 3.78 in. (85 mm x 96 mm) | |
| Compression Ratio | 22:1 | |
| Minimum C.C.A. at 5°C | 580 | |
| RPM | 1800 rpm | 1500 rpm |
| BHP Minimum REQ'D | | |
| at Rated kW | 26 | 23.4 |
| BMEP | 125 psi | 135 psi |

Generator Set Deration

Factors

Temperature:
 2.5% for every 5° F above 105° F
 2.5% for every 9°C above 41°C

Altitude

3% for every 1000 feet above
 600 feet
 3% for every 305 meters above
 183 meters

Cooling System

High Ambient 105°F (41°C) System
 Coolant Capacity with Radiator
 5.5 qt. (5.2 L)

Maximum restriction on discharge side of
 radiator .5 In wc (125 Pa)

| | 1800 rpm | 1500 rpm |
|--|------------------------------|-----------------------------|
| Coolant Flow | | |
| | 9.75 GPM (36.9 LPM) | 8.25 GPM (31.2 LPM) |
| Heat Rejection to Coolant at Full Load | | |
| | 1055 Btu/min (111 MJ/min) | 950 Btu/min (100 MJ/min) |

Air System

| | 1800 rpm | 1500 rpm |
|--------------------------------------|--|--|
| Maximum Air Intake Restriction | | 30 In wc (7.5 kPa) |
| Radiator Cooling Air Flow | 2700 cfm (76.4 m ³ /min) | 2433 cfm (68.9 m ³ /min) |
| Combustion Air Flow | 60 cfm (1.7 m ³ /min) | 50 cfm (1.4 m ³ /min) |
| Generator Cooling Air Flow | 453 cfm (12.8 m ³ /min) | 378 cfm (10.7 m ³ /min) |

Exhaust System

Exhaust
 Outlet Size 1.8 in. dia. (4.5 cm)
 Maximum Allowable Back Pressure
 40.9 In wc (10.2 kPa)

Exhaust Gas Flow

| at Standby Rating | 1800 rpm | 1500 rpm |
|----------------------|--------------------------------------|--------------------------------------|
| | 170 cfm (4.8 m ³ /min) | 142 cfm (4.0 m ³ /min) |

Exhaust Temp at
 Standby Rating

| | |
|-------------------|------------------|
| 1000°F (578°C) | 970°F (521°C) |
|-------------------|------------------|

Fuel System

Consumption at Standby Rating:

| Load | 1800 RPM | | |
|------|-----------------|----------|---------|
| | kW | US gal/h | Litre/h |
| 1/4 | 3.75 | .38 | 1.44 |
| 1/2 | 7.5 | .68 | 2.57 |
| 3/4 | 11.25 | 1.01 | 3.82 |
| Full | 15 | 1.35 | 5.11 |
| Load | 1500 RPM | | |
| | kW | US gal/h | Litre/h |
| 1/4 | 3.5 | .34 | 1.29 |
| 1/2 | 7.1 | .61 | 2.31 |
| 3/4 | 10.5 | .92 | 3.48 |
| Full | 14 | 1.2 | 4.54 |

Governor Type Mechanical
Governor Regulation:
 +/- 3-5% Steady State

Generator

| | |
|---|----------|
| Manufacturer | MagneTek |
| Model | MTG20 |
| Motor Starting KVA, 240/480 Volt WYE at 35% Voltage Dip, 100% Voltage Recovery | 44 SKVA |
| Maximum Motor Starting KVA, 35% Voltage Dip Oversized Generator MTG23 | 65 SKVA |

Reactances

| | | |
|---------------------------------|-------|-------|
| | 480 V | 400 V |
| at 105°C rise | 60Hz | 50Hz |
| Synchronous Xd | 2.54 | 2.03 |
| Direct Axis Transient X'd | .208 | .166 |
| Direct Axis Subtransient X'd | .166 | .133 |
| Zero Sequence Xo | .0025 | .0020 |

Lubrication System

Engine Oil Capacity with Filters
 1.7 US gal. (6.4 L)
 Oil Filter Type Spin On

Engine Exhaust Emissions Certification Values

| Exhaust Emissions (g/bhp-hr.) | *CARB | | 15QD |
|-------------------------------|--------------|-----|-------------|
| | | | |
| HC | 1 | .1 | |
| CO | 4.8 | .9 | |
| NOX | 6.9 | 4.5 | |
| PM | .63 | .3 | |
| Smoke Opacity (%) | | | |
| Acceleration | 20 | 12 | |
| Lugging | 15 | 3 | |
| Peak | 50 | 14 | |

* California Air Resources Board
 Standards.

Model 15 QD 15 kW Diesel Generator Set

Options:

Generator

- * Upsized
- * Tropical winding protection
- * Space heater
- * Series boost
- * UL listed mainline circuit breaker

Control

- * Remote alarm annunciator
- * Emergency stop
- * Multi-point dry contact board.
- * NFPA 110 Compliance
- * Low Temperature Display
- * Heater

Engine

- * Battery/Battery heater
- * Battery charger
- * Engine pre-heater
- * Fuel/ water separator
- * Isochronous governor


Generator Set

- * EMPS automatic transfer switch
- * Industrial silencer
- * Residential silencer
- * Critical silencer
- * Weather protective enclosure
- * Sound attenuation
- * Sub-base fuel tank

DOOR SWING:
ENGINE DOOR: 28.75
SECURITY DOOR: 30.25

MACHINE WEIGHT:
ENCLOSED DRY WEIGHT 1771 LBS [803.3 KG]

NOTES:
PRELIMINARY DRAWING DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE.

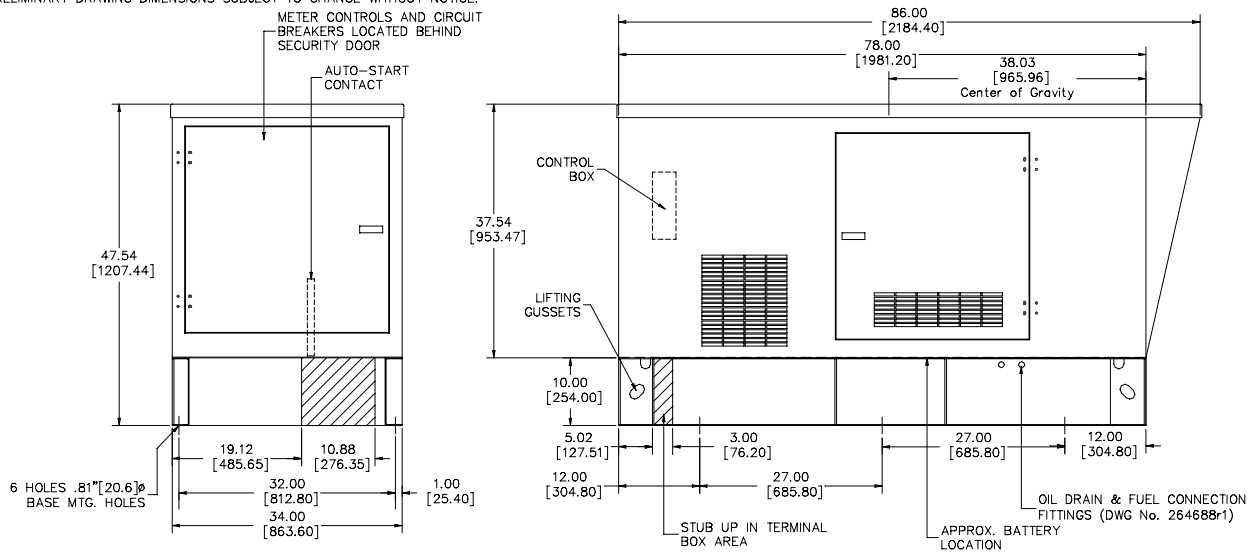

58 Elliott Power Drive
P.O. Box 403
Lexington, TN 38351
Tel: 901-967-9393
Fax: 901-968-0161

Distributed by:



All specifications subject to change without notice. Printed in the USA

Updated 2/00