



# Model 150 RN 150 kW Natural Gas Generator Set


## Generator Set Rating

Three Phase	60 Hz	50 Hz
	kW/KVA	kW/KVA
Continuous		
Standby 150°C	150/187	135/168
Prime Power 105°C	135/168	122/152
Single Phase	60 Hz	50 Hz
	kW/KVA	kW/KVA
Continuous		
Standby 150°C	96/96	107/107
Prime Power 105°C	80/80	80/80

## Quality Power Producing Equipment

is our business at Elliott MagneTek Power Systems, Inc.. Our power systems offer solutions to requirements for reliable, quality electrical power.

- 100% full load tested.
- Performance supported by prototype testing.
- 12 lead re-connectable AC synchronous generators.
- Solid state automatic voltage regulator.
- 50 or 60 Hz operational.
- Standard Digital Control Panel meeting standards set by NFPA-110.

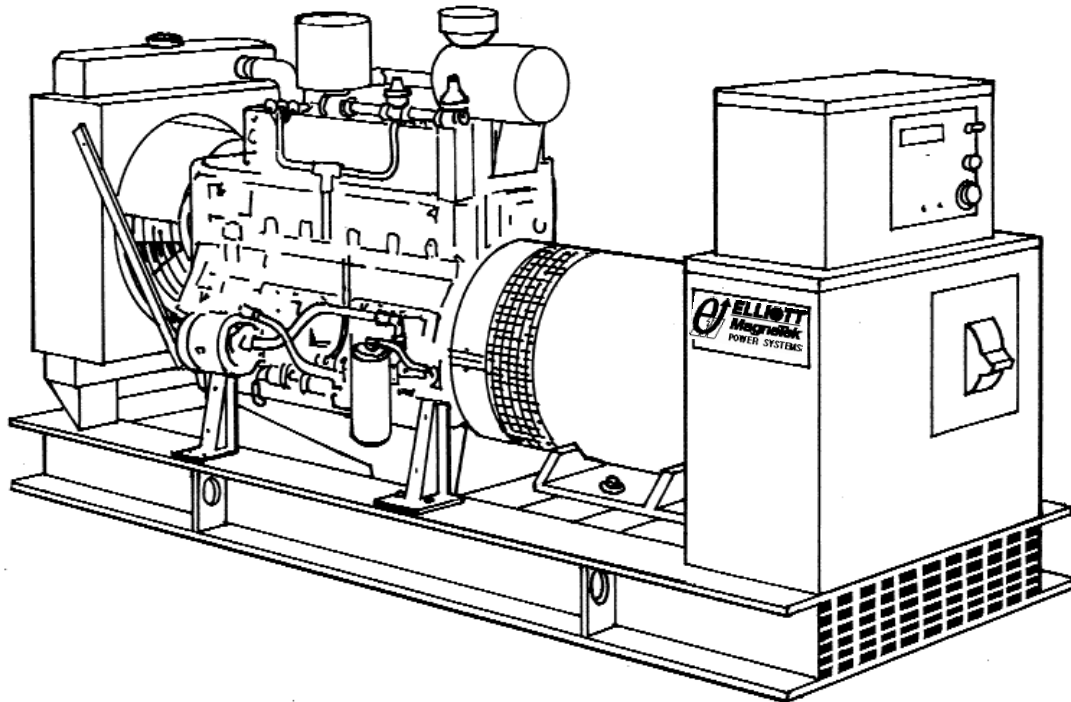

## Product Features

### System Reliability and Longevity

begin with design experience and integrity. EMPS was formed by two companies with over one hundred years experience producing state-of-the-art power generation equipment. This experience is designed into our generator sets.

### Single Source Responsibility:

Product service, support and parts available through EMPS network of distributors.

### Accessories and Flexibility

are designed into EMPS' generator sets at the factory level to meet specific application needs.

### Organizational Commitment

to innovative, leading edge technology and environmentally friendly electrical products and services.

# Generator Set Design Features

## Model 150 RN 150 kW NG Generator Set

### Standard Equipment

- \* 4 Cycle engine.
- \* AC synchronous 12 lead re-connectable brushless alternator.
- \* Steel base with vibration isolators between engine, generator and base.
- \* Generator mounted terminal and meter /control box.
- \* Circuit breaker-mounting provisions.
- \* Connection area for main AC terminals and all control wiring
- \* 24 volt DC engine electrical system.
- \* 24 volt starter motor.
- \* Battery charging alternator.
- \* Battery rack and cables.
- \* Flexible fuel lines.
- \* Most metallic parts incorporate our powder paint primer base coat with UV inhibitive enamel top coat.
- \* Single stage dry type air cleaner.
- \* Corrosion resistant hardware.
- \* Oil drain extension plumbed to base rail for convenient connection.
- \* Microprocessor based auto start meter/ control panel.
- \* Digital read out control system rated to operate from -30° C to 75° C with the following standard displays, shown continuously:
  - \*\* Generator AC voltage.
  - \*\* AC amperage:
    - Phase 1-2
    - Phase 2-3
    - Phase 3-1
  - \*\* Frequency
  - \*\* Oil Pressure
  - \*\* Engine Temperature
  - \*\* Battery Voltage
  - \*\* Fuel Level (Diesel Only)
- \* The following can be displayed using the scroll lock function:
  - \*\* Run time
  - \*\* Safety set point for over speed
  - \*\* Over crank
  - \*\* High water temperature
  - \*\* Low oil pressure
- \* Voltage adjust rheostat
- \* Auto/off /run switch

### Generator Specifications

**Manufacturer:** MagneTek

**Insulation:** The main stator, main rotor, exciter stator and exciter rotor are all insulated with Class H materials and rated Class F per NEMA MG1 -1.65 and 852757 definition. All materials are non-hygroscopic to prevent fungus growth. A polyester and epoxy combination offers maximum environmental protection.

**Main Stator:** 2/3 pitch and one slot skewing minimize voltage harmonics and meets telephone influence factor (TIF) per NEMA MG1-22.43. Twelve lead re-connectable design. Coated with anti-abrasive sealer.

**Main Rotor:** Four pole single piece lamination with full amortisseur windings and coil supports. Winding is precision wet layer wound with epoxy resin and dynamically balanced to two mil in two planes. Production over speed tested at 125% for 15 minutes. All materials are non-hygroscopic to prevent fungus growth.

**Exciter:** Brushless, three phase, six-pole rotor, and production over speed tested at 125% operating speed.

**Rotating Diode:** Sealed full wave with metal oxide surge suppressor

**Bearing:** Double-sealed, permanently lubricated, 50,000 hour B-10 life including magnetic pull.

**Drive Coupling:** Positive alignment, flexible drive discs.

### Automatic Voltage Regulator Specifications

**Operation:** Volts per hertz, three phase sensing with overload and loss of sensing protection.

**Construction:** Solid state, modular: fully sealed and potted design provides component protection from corrosive environments and vibration.

**Voltage Regulation:** +/- 1% voltage regulation no load to full rated load: +/- 1/2% voltage regulation at steady state conditions.

**Radio Interference (RFI):** Integral filter provides suppression of conducted electromagnetic interference to levels meeting most commercial requirements.

### Voltage Selections and Full Load Amperages at Standby Rating

Three Phase

60 Hz Amperage	50 Hz Amperage
120/208	520 110/190 513
120/240	451 120/208 468
277/480	225 230/400 244
347/600	180 240/415 235

\*Single Phase

60 Hz Amperage	50 Hz Amperage
120/240	400 110/220 486

All voltages listed are available and/or re-connectable with the exception of the three phase, 60 Hz, 347/600 volt generator which is application specific. For other voltages, contact your EMPS distributor. All output amperage ratings listed above are at standby rating.

\*Single Phase amperage based on standard generator and unity power factor. For full single phase output use generator model MTG42.

### Application and Performance Data

MagneTek Alternator Model MTG38 is standard with this package. Larger generators may be required to meet certain application specific requirements such as Single Phase, Motor Starting and Non Linear Loads. The Maximum Generator rating available in this package is MTG47.

# Technical Specifications

## Model 150 RN 150 kW NG Generator Set

### Engine Specifications

Manufacturer	Cummins	
Model	GTA 8.3-G2	
Type	4 cycle, In line	
Aspiration	Turbo/ After cooled	
Cylinders	6	
Displacement	504.5 In <sup>3</sup> . (8.3 L)	
Bore and Stroke,	4.49 in x 5.32 in. (114 mm x 135 mm)	
Compression Ratio	10.5:1	
Minimum C.C.A. at 5°C	900	
RPM	<b>1800 rpm</b>	<b>1500 rpm</b>
BHP Minimum REQ'D		
at Rated kW	228	208
BMEP	199 psi	218 psi

### Altitude and Ambient

#### Temperature Requirements

The engine may be operated at the STANDBY RATING up to 3000ft.(914m) altitude and 100°F(38°C) inlet air temperature and at the PRIME AND CONTINUOUS POWER RATING up to 5000ft.(1524m) altitude and 100°F(38°C) inlet air temperature. For sustained operation at higher altitudes and temperatures, please contact the factory.

### Cooling System

Coolant Capacity with Radiator  
28 US Gal. (86.6 L)

Maximum restriction on discharge side of radiator  
.5 In wc (125 Pa)

	<b>1800 rpm</b>	<b>1500 rpm</b>
Coolant Flow	55 GPM (208 LPM)	50 GPM (189 LPM)

Heat Rejection to Coolant at Rated Full Load	7619 Btu/min (804 MJ/min)	6956 Btu/min (734 MJ/min)
--	------------------------------	------------------------------

Heat Rejection to Room at Rated Full Load	952 Btu/min (100 MJ/min)	869 Btu/min (92 MJ/min)
---	-----------------------------	----------------------------

Heat Rejection to Aftercooler at Rated Full Load	816 Btu/min (86 MJ/min)	745 Btu/min (79 MJ/min)
--	----------------------------	----------------------------

### Air System

	<b>1800 rpm</b>	<b>1500 rpm</b>
Maximum Air Intake Restriction	25 In wc (6.25 kPa)	15 In wc (3.75 kPa)
Radiator Cooling Air Flow	16000 cfm (453 m <sup>3</sup> /min)	14608 cfm (413 m <sup>3</sup> /min)
Combustion Air Flow	513 cfm (15 m <sup>3</sup> /min)	468 cfm (13 m <sup>3</sup> /min)
Generator Cooling Air Flow	2348 cfm (66.4 m <sup>3</sup> /min)	2144 cfm (60.7 m <sup>3</sup> /min)

### Exhaust System

Exhaust Outlet Size	3.5 in. dia. (89 mm)
Maximum Allowable Back Pressure	2 In Hg

Exhaust Gas Flow at Standby Rating	1485 cfm (42 m <sup>3</sup> /min)	1356 cfm (38 m <sup>3</sup> /min)
------------------------------------	--------------------------------------	--------------------------------------

Exhaust Temp at Standby Rating	1100°F (593°C)	1004°F (540°C)
--------------------------------	-------------------	-------------------

### Fuel System

Consumption at Standby Rating:	
<b>Load</b>	<b>1800 RPM Natural Gas</b>
	C.F.H.(Cu.M./Hr.)
1/4	37 555 (15.7)
1/2	75 912 (25.8)
3/4	112 1314 (42.8)
Full	150 1728 (48.9)

<b>Load</b>	<b>1500 RPM Natural Gas</b>
	C.F.H. (Cu.M./Hr.)
1/4	33 515 (14.3)
1/2	67 877 (23.6)
3/4	101 1200 (34)
Full	135 1531 (44.7)

**Governor Type** Mechanical  
**Governor Regulation:** +/- .5% Steady State

### Generator

Manufacturer	MagneTek
Model	MTG38
Motor Starting KVA, 240/480 Volt WYE at 35% Voltage Dip, 100% Voltage Recovery	360 SKVA
Maximum Motor Starting KVA, 35% Voltage Dip Oversized Generator	780 SKVA

### Reactances

	480 V	400 V
at 105°C rise	60Hz	50Hz
Synchronous Xd	3.11	2.63
Direct Axis Transient X'd	.231	.196
Direct Axis Subtransient X"d	.151	.128
Negative Sequence X <sub>2</sub>	.198	.168
Zero Sequence X <sub>0</sub>	.0027	.0023

### Lubrication System

Engine Oil Capacity with Filters  
32 qts. (34.1 L)  
Oil Filter Type Spin On

### Engine Exhaust Emissions Values

Per Cummins Emissions Data Sheet

	@SB	@PRIME	@CONT.
THC	1.4	1.85	1.81
NMHC	.07	.09	.09
NOX	14.81	15.32	17.85
CO	.07	.09	.11
CO2	9.40%	9.40%	8.70%
O2	4.60%	8.70%	5.30%

# Model 150 RN 150 kW NG Generator Set

## Options:

### Generator

- \* Upsized
- \* Tropical winding protection
- \* Space heater
- \* Series boost
- \* UL listed mainline circuit breaker

### Control

- \* Remote alarm annunciator
- \* Emergency stop
- \* Multi-point dry contact board.
- \* NFPA 110 Compliance
- \* Low Temperature Display
- \* Heater


### Engine

- \* Battery/Battery heater
- \* Battery charger
- \* Engine pre-heater
- \* Fuel/ water separator
- \* Isochronous governor

### Generator Set

- \* EMPS automatic transfer switch
- \* Industrial silencer
- \* Residential silencer
- \* Critical silencer
- \* Weather protective enclosure
- \* Sound attenuation

DOOR SWING: ENGINE DOOR: 40.68 SECURITY DOOR: 33.62  
 MACHINE WEIGHT: OPEN DRY WEIGHT 2998 LBS [1359 KG] ENCLOSED DRY WEIGHT 3688 LBS [1672.9 KG]  
 NOTES: PRELIMINARY DRAWING DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE.

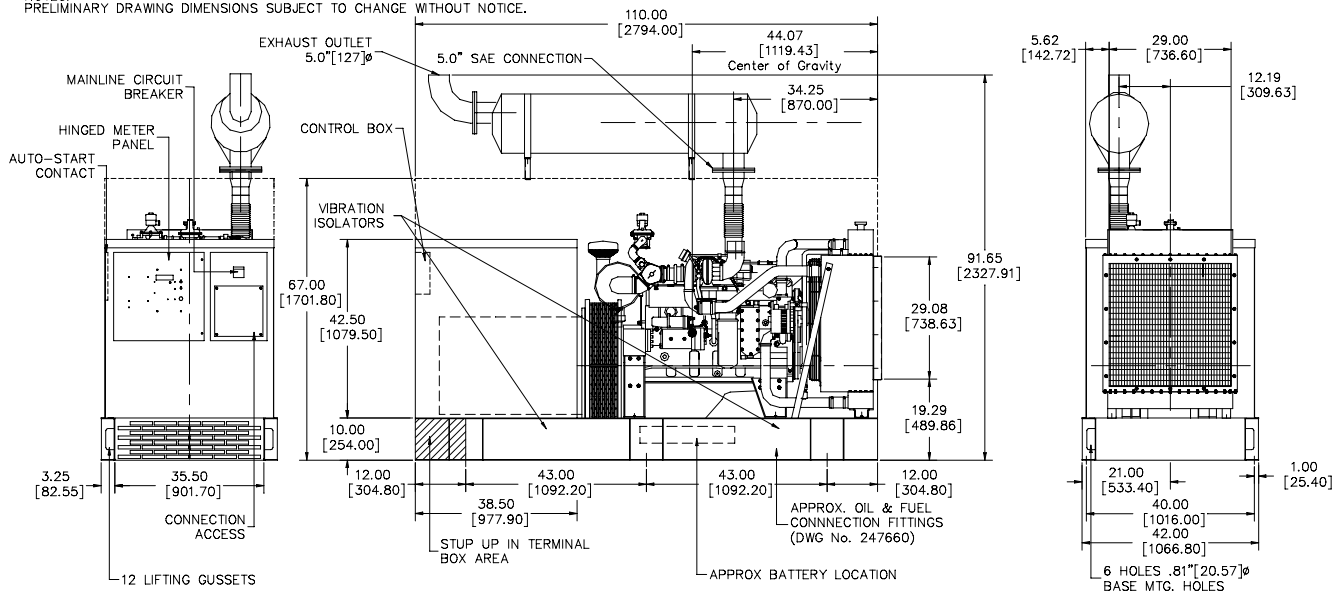

58 Elliott Power Drive  
 P.O. Box 403  
 Lexington, TN 38351  
 Tel: 901-967-9393  
 Fax: 901-968-0161

**Distributed by:**



All specifications subject to change without notice. Printed in the USA

Updated 2/00