



Model 300 RN 300 kW Natural Gas Generator Set


Generator Set Rating

Three Phase	60 Hz	50 Hz
	kW/KVA	kW/KVA
Continuous		
Standby 150°C	300/375	280/350
Prime Power 105°C	275/344	255/319
Single Phase	60 Hz	50 Hz
	kW/KVA	kW/KVA
Continuous		
Standby 150°C	235/235	241/241
Prime Power 105°C	201/201	201/201

Quality Power Producing Equipment

is our business at Elliott MagneTek Power Systems, Inc.. Our power systems offer solutions to requirements for reliable, quality electrical power.

- 100% full load tested.
- Performance supported by prototype testing.
- 12 lead re-connectable AC synchronous generators.
- Solid state automatic voltage regulator.
- 50 or 60 Hz operational.
- Standard Digital Control Panel meeting standards set by NFPA-110.

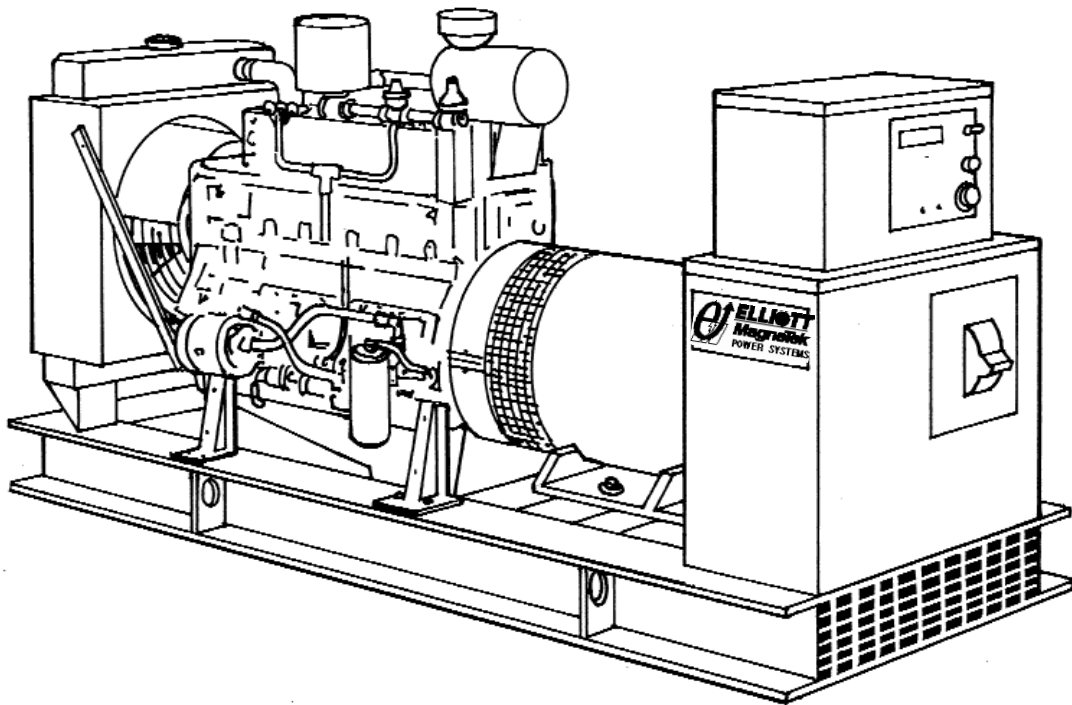

Product Features

System Reliability and Longevity

begin with design experience and integrity. EMPS was formed by two companies with over one hundred years experience producing state-of-the-art power generation equipment. This experience is designed into our generator sets.

Single Source Responsibility:

Product service, support and parts available through EMPS network of distributors.

Accessories and Flexibility

are designed into EMPS' generator sets at the factory level to meet specific application needs.

Organizational Commitment

to innovative, leading edge technology and environmentally friendly electrical products and services.

Generator Set Design Features

Model 300 RN 300 kW NG Generator Set

Standard Equipment

- * 4 Cycle engine.
- * AC synchronous 12 lead re-connectable brushless alternator.
- * Steel base with vibration isolators between engine, generator and base.
- * Generator mounted terminal and meter /control box.
- * Circuit breaker-mounting provisions.
- * Connection area for main AC terminals and all control wiring
- * 24 volt DC engine electrical system.
- * 24 volt starter motor.
- * Battery charging alternator.
- * Battery rack and cables.
- * Flexible fuel lines.
- * Most metallic parts incorporate our powder paint primer base coat with UV inhibitive enamel top coat.
- * Single stage dry type air cleaner.
- * Corrosion resistant hardware.
- * Oil drain extension plumbed to base rail for convenient connection.
- * Microprocessor based auto start meter/ control panel.
- *Digital read out control system rated to operate from -30° C to 75° C with the following standard displays, shown continuously:
 - ** Generator AC voltage.
 - ** AC amperage:
 - Phase 1-2
 - Phase 2-3
 - Phase 3-1
 - ** Frequency
 - ** Oil Pressure
 - ** Engine Temperature
 - ** Battery Voltage
 - ** Fuel Level (Diesel Only)
- * The following can be displayed using the scroll lock function:
 - ** Run time
 - ** Safety set point for over speed
 - ** Over crank
 - ** High water temperature
 - ** Low oil pressure
- * Voltage adjust rheostat
- * Auto/ off /run switch

Generator Specifications

Manufacturer: MagneTek

Insulation: The main stator, main rotor, exciter stator and exciter rotor are all insulated with Class H materials and rated Class F per NEMA MG1 -1.65 and 852757 definition. All materials are non-hygroscopic to prevent fungus growth. A polyester and epoxy combination offers maximum environmental protection.

Main Stator: 2/3 pitch and one slot skewing minimize voltage harmonics and meets telephone influence factor (TIF) per NEMA MG1-22.43. Twelve lead re-connectable design. Coated with anti-abrasive sealer.

Main Rotor: Four pole single piece lamination with full amortisseur windings and coil supports. Winding is precision wet layer wound with epoxy resin and dynamically balanced to two mil in two planes. Production over speed tested at 125% for 15 minutes. All materials are non-hygroscopic to prevent fungus growth.

Exciter: Brushless, three phase, six-pole rotor, and production over speed tested at 125% operating speed.

Rotating Diode: Sealed full wave with metal oxide surge suppressor

Bearing: Double-sealed, permanently lubricated, 50,000 hour B-10 life including magnetic pull.

Drive Coupling: Positive alignment, flexible drive discs.

Automatic Voltage Regulator Specifications

Operation: Volts per hertz, three phase sensing with overload and loss of sensing protection.

Construction: Solid state, modular: fully sealed and potted design provides component protection from corrosive environments and vibration.

Voltage Regulation: +/- 1% voltage regulation no load to full rated load: +/- 1/2% voltage regulation at steady state conditions.

Radio Interference (RFI): Integral filter provides suppression of conducted electromagnetic interference to levels meeting most commercial requirements.

Voltage Selections and Full Load Amperages at Standby Rating

Three Phase

60 Hz Amperage	50 Hz Amperage
120/208	1042 110/190 1064
120/240	902 120/208 971
277/480	451 230/400 505
347/600	361 240/415 487

*Single Phase

60 Hz Amperage	50 Hz Amperage
120/240	979 110/220 1095

All voltages listed are available and/or re-connectable with the exception of the three phase, 60 Hz, 347/600 volt generator which is application specific. For other voltages, contact your EMPS distributor. All output amperage ratings listed above are at standby rating.

*Single Phase amperage based on standard generator and unity power factor. For full single phase output use generator model MTG49.

Application and Performance Data

MagneTek Alternator Model MTG45 is standard with this package. Larger generators may be required to meet certain application specific requirements such as Single Phase, Motor Starting and Non Linear Loads. The Maximum Generator rating available in this package is MTG52.

Technical Specifications

Model 300 RN 300 kW NG Generator Set

Engine Specifications

Manufacturer	Cummins	
Model	GTA 19	
Type	4 Cycle	
Aspiration	Turbo/ After cooled	
Cylinders	6	
Displacement	1150 In ³ . (19 L)	
Bore and Stroke,	6.25 in x 6.25 in. (159 mm x 159 mm)	
Compression Ratio	10:1	
Minimum C.C.A. at 5°C	900	
RPM	1800 rpm	1500 rpm
BHP Minimum REQ'D		
at Rated kW	452	413
BMEP	173 psi	190 psi

Altitude and Ambient Temperature Requirements

The engine may be operated at the STANDBY RATING up to 3000 ft.(914m) altitude and 100°F (38°C) inlet air temperature and at the PRIME AND CONTINUOUS POWER RATING up to 5000 ft.(1524m) altitude and 100°F (38°C) inlet air temperature. For sustained operation at high load factor at higher altitudes and temperatures, please contact factory.

Cooling System

Coolant Capacity with Radiator	33.25 Gal. (126 L)	
Maximum restriction on discharge side of radiator	5 In wc (125 Pa)	
	1800 rpm	1500 rpm
Coolant Flow		
	189 GPM (717 LPM)	173 GPM (655 LPM)

Heat Rejection to Coolant at Rated		
Full Load	20473 Btu/min	18692 Btu/min
Nat. Gas	(2160 MJ/min)	(1972 MJ/min)

Heat Rejection to Room at Rated		
Full Load	2459 Btu/min	2245 Btu/min
Nat. Gas	(259 MJ/min)	(237 MJ/min)

Heat Rejection to Charge Air Cooler at Rated		
Full Load	3200 Btu/min	2922 Btu/min
Nat. Gas	(338 MJ/min)	(308 MJ/min)

Air System

	1800 rpm	1500 rpm
Maximum Air Intake Restriction	15 In wc (3.74 kPa)	14 In wc (3.49 kPa)
Radiator Cooling Air Flow	40000 cfm (1132 m ³ /min)	36520 cfm (1034 m ³ /min)
Combustion Air Flow	713 cfm (20 m ³ /min)	651 cfm (18 m ³ /min)
Generator Cooling Air Flow	3104 cfm (88 m ³ /min)	2834 cfm (80 m ³ /min)

Exhaust System

Exhaust Manifold Outlet Size	5 in. dia. (127 mm)	
Maximum Allowable Back Pressure	2 In Hg	
Exhaust Gas Flow at Standby Rating		
Rating	2495 cfm (71 m ³ /min)	2278 cfm (64 m ³ /min)
Exhaust Temp at Standby Rating	1350°F (732°C)	1233°F (667°C)

Fuel System

Consumption at Standby Rating:

Load		1800 RPM
		Natural Gas
	kW	C.F.H.(Cu.M./Hr.)
1/4	75	1176 (33.3)
1/2	150	1943 (55.0)
3/4	225	2624 (74.3)
Full	300	3291 (93.1)
Load		1500 RPM
		Natural Gas
	kW	C.F.H. (Cu.M./Hr.)
1/4	70	1074 (30.4)
1/2	140	1774 (50.2)
3/4	210	2396 (67.8)
Full	280	3005 (85.0)

Governor Type Electronic
Governor Regulation:

+/- .25 % Steady State

Generator

Manufacturer	MagneTek
Model	MTG45
Motor Starting KVA, 240/480 Volt WYE at 35% Voltage Dip, 100% Voltage Recovery	790 SKVA
Maximum Motor Starting KVA, 35% Voltage Dip Oversized Generator	1262 SKVA

Reactances

	480 V	400 V
at 105°C rise	60Hz	50Hz
Synchronous Xd	3.13	2.91
Direct Axis Transient X'd	.305	.283
Direct Axis Subtransient X"d	.175	.162
Negative Sequence X ₂	.189	.176
Zero Sequence X ₀	.0038	.0035

Lubrication System

Engine Oil Capacity with Filters	64 US gal. (61 L)
Oil Filter Type	Spin On

Engine Exhaust Emissions

Per Cummins Engine Data Sheet #ES1725A

	@SB	@PRIME	@CONT
THC	2.35	1.98	1.68
NMHC	.49	.42	.35
NEHC	.17	.15	.12
NOX	15.78	16.17	15.98
CO	.37	.6	.32
CO ₂	9.30%	9.50%	10.00%
O ₂	4.30%	4.00%	3.10%

Model 300 RN 300 kW NG Generator Set

Options:

Generator

- * Upsized
- * Tropical winding protection
- * Space heater
- * Series boost
- * UL listed mainline circuit breaker

Control

- * Remote alarm annunciator
- * Emergency stop
- * Multi-point dry contact board.
- * NFPA 110 Compliance
- * Low Temperature Display Heater


Engine

- * Battery/Battery heater
- * Battery charger
- * Engine pre-heater
- * Fuel/ water separator

Generator Set

- * EMPS automatic transfer switch
- * Industrial silencer
- * Residential silencer
- * Critical silencer
- * Weather protective enclosure
- * Sound attenuation

DOOR SWING: ENGINE DOOR: 52.26 SECURITY DOOR: 39.00
 MACHINE WEIGHT: OPEN DRY WEIGHT 9333 LBS [4233.4 KG] ENCLOSED DRY WEIGHT 10533 LBS [4777.7 KG]
 NOTES: PRELIMINARY DRAWING DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE.

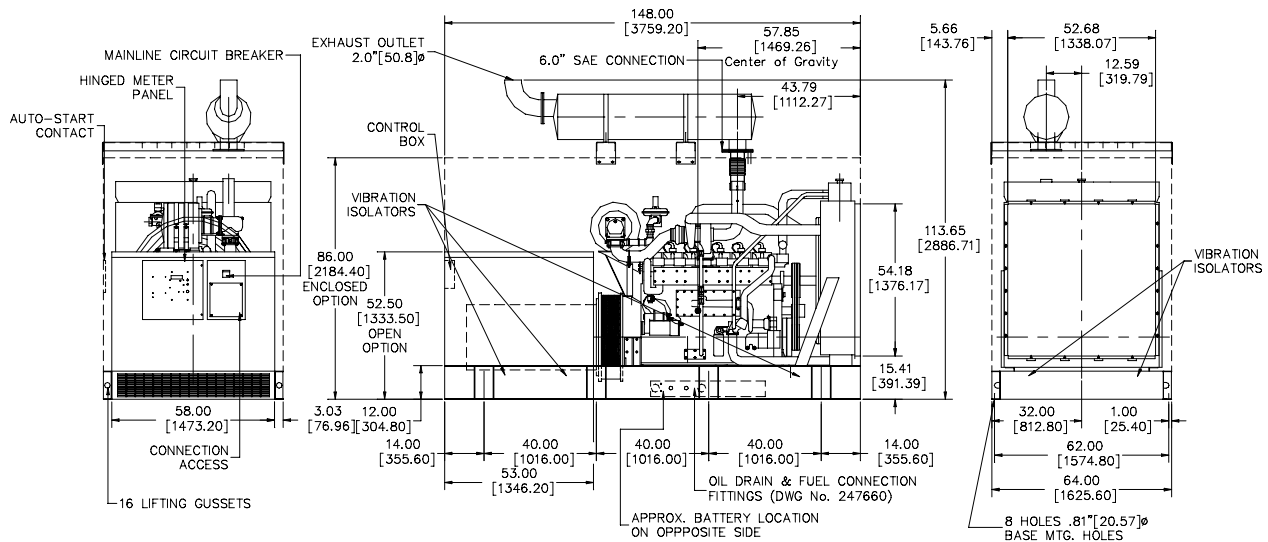

58 Elliott Power Drive
 P.O. Box 403
 Lexington, TN 38351
 Tel: 901-967-9393
 Fax: 901-968-0161

Distributed by:



All specifications subject to change without notice. Printed in the USA

Updated 2/00